


TK 10ft x 16 Ga. Duct Notcher



TK 10ft x 16 Ga.

NOTCHING DIAGRAM FOR TYPICAL SQUARE DUCT

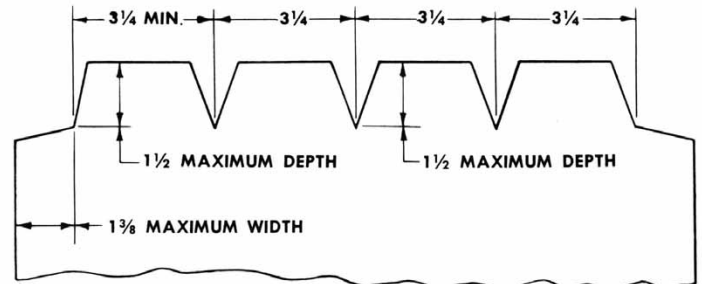

NOTCHING HEADS

- 1—LEFT HAND 115° CORNER NOTCH
- 3—40° VEE NOTCH
- 1—RIGHT HAND 115° CORNER NOTCH

TK Hydraulic Duct Notcher

Notches up to 6 times faster than hand notching. This 5 headed gang notcher is a fast and easy way to notch sheet metal ducting, in preparation to receive bar, S Cleats and Drive Cleats...or other drive connections. A real money maker in that it is fast, accurate and durable.

Specifications: * Capacity: 16 – 28 gauge mild steel

- No. Notching Heads. 3 V and 2 corner, for 5 total.
- V Notch. 1 1/2" max
- Corner Notch. 1 1/4" max
- Motor & Electrics. 3 HP Dual Voltage, 115- 230/1/60, 1800 RPM
- Shipping. 79" L x 36" W x 36"H, 880 lbs.

This notcher allows you to gang-notch sheet metal hydraulically up to 600% faster than by hand, without layout or scribing. It's the perfect tool for preparing bar, slip or "s" and other drive connection.

TAAG Industries Corp.
"The TIN KNOCKER People"
1550 Simpson Way, Escondido, CA 92029
Tel: (800)640-0746 Fax: (760)727-9948 Email: info@taagind.com
www.tinknocker.com