

QUICK CHANGE DISCS

QUICK CHANGE DISCS

Grit Comparison Chart


	GRAIN	COLOR	STANDARD	HEAVY DUTY
Coarse	A/O	Brown	60	50-60
Medium	A/O	Maroon	80-120	60-100
Very Fine	A/O	Blue	180-240	-
Super Fine	S/C	Gray	240-320	-



Coated Quick Change Discs
on pages 49-53.



Turn On



2 - 4" Quick Change Discs - Surface Conditioning

- For stainless steel, and ferrous & non-ferrous metals.
- Premium** - Blending and rust/burr removal.
- Finish Pro** - High performance design for demanding cleaning, deburring and finishing.


Uses USA Developed,
Automated Spin-Weld
Attachment Process for Fast
and Secure Fastening.

SIZE	RPM	DENSITY / GRAIN / GRADE	ROLL ON PREMIUM SURFACE CONDITIONING DISCS UPC#	ROLL ON FINISH PRO SURFACE CONDITIONING DISCS UPC#	TURN ON PREMIUM SURFACE CONDITIONING DISCS UPC#	TURN ON FINISH PRO SURFACE CONDITIONING DISCS UPC#	CARTON QTY
2"	25,000	Coarse - Brown	59503	59743	59610	59749	50
		Medium - Maroon	59504	59744	59611	59750	
		A Very Fine - Blue	59505	New 59745	59612	New 59751	
		S Ultra Fine - Grey	59608				
3"	20,000	Coarse - Brown	59506	59746	59614	59752	25
		Medium - Maroon	59507	59747	59615	59753	
		A Very Fine - Blue	59508	59748	59616	59754	
		S Ultra Fine - Grey	59609				
4"	12,000	Coarse - Brown	59509				25
		Medium - Maroon	59510				
		A Very Fine - Blue	59511				

New Heavy Duty 2 - 3" Quick Change Discs - Surface Conditioning, Roll On


2 - 4X Faster Stock Removal

- Heavy Duty disc - Aggressive surface conditioning discs for tough cleaning, deburring and finishing.
- Ideal for rugged applications where standard grade discs shred.
- 2X longer working life than standard discs.**
- Use on steel, stainless steel and ferrous & non-ferrous metal.



59739

Heavy Duty Coarse - Brown

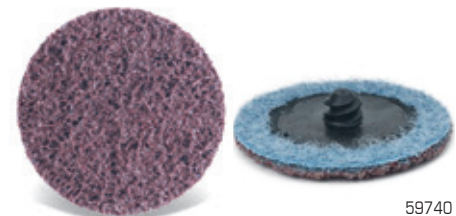

59740

Heavy Duty Medium - Maroon

SIZE	RPM	DENSITY / GRAIN / GRADE	ROLL ON HEAVY DUTY SURFACE CONDITIONING DISCS UPC#	GRIT	CARTON QTY
2"	25,000	Coarse - Brown	New 59739	50-60	50
		Medium - Maroon	59740	60-100	
3"	20,000	Coarse - Brown	59741	50-60	25
		Medium - Maroon	59742	60-100	